




MDPRINT – Desktop Card printer

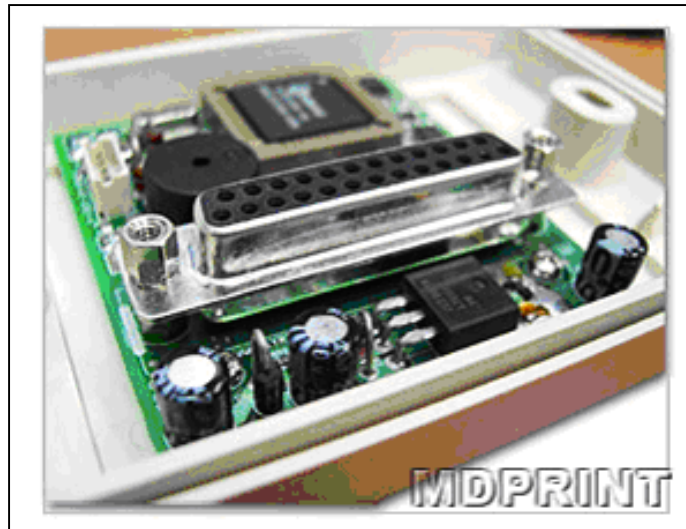

Features.

Distinguishable audiovisual indication of tri-color LED and multi-tone beeper which can also be controlled individually by the host system.

Potted (solid epoxy) electronics (tamper switch) protect against vandalism.

Mounting on standard single gang electrical switch box for easy installation.

Compatible with Wiegand 26/34/42 bits and RS485 format, or user format.

Self-test on reader power-up to verify the setup configuration and initialize reader operation.

All RF data transmission between the card and reader is encrypted.

	Specifications
Interface	RS485 format
Baud rate	19.200 bps (4.800 ~ 115.200)
ID	1 to 8 or 01 to 99
Printer port	25 Pin x1
Indicator	4 LED
Beeper	Build-in
Power supply input	8V to 15 V DC
Power consumption	0,5W ~ 3W
Dimensions (mm)	75W x 115H x 15D