


## Xtive 2.45 RFID Card Readers

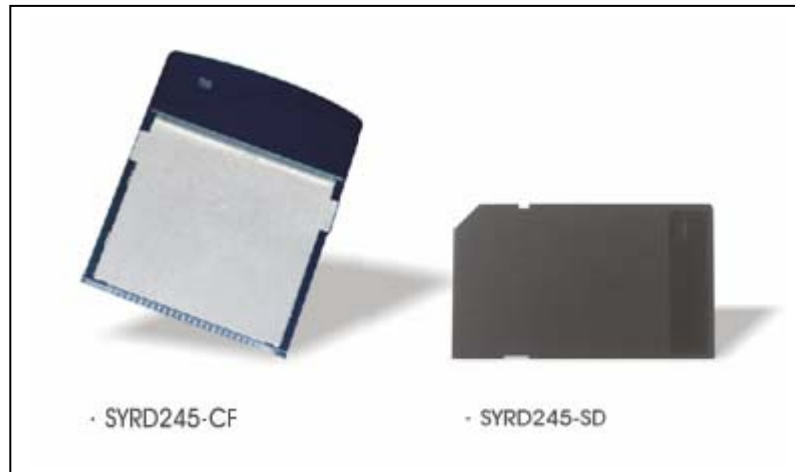

Inserted into PDA or Notebook as handheld or portable readers  
Compatible with the interface of the CF / SD card.  
Multi-Tag (anti-collision) Capability  
LED Indicator

### SYSTEM

Communication 2.45 GHz  
Frequency 2.40 - 2.48 GHz  
Channel 255, Address 65536  
RSSI 0-255  
LQI 0-255

PROGRAM Set Parameter  
LED Reader action or R/W status  
Interface CF Type 1/SD IO  
Read range 16M  
System PDA Pocket PC 2003

### POWER

Action current Max 50mA @ 3.3 VDC

### ENVIRONMENT

Operating TEMP -20°C to 65°C , 5 to 95% RH

### DIMENSIONS

(CF) W: 42.7mm H: 55.3mm D: 6.24mm  
(SD) W: 40.5mm H: 23.9mm D: 2.35mm