

Install and Operation Instructions SYRDU5 Serial Reader

USB and RS-232 Dual Interface
Baud rate 4,800-115,200 bps



SYRIS Technology Corp.

SYRIS EUROPE S.A.

119/3 Boulevard Louis Schmidt

1040 Brussels - Belgium



TEL : +32 2743 7193

FAX : +32 2733 1325

E-Mail : service@syris.net

Website : <http://www.syris.net>

SYRDU5 WIRING DIAGRAM

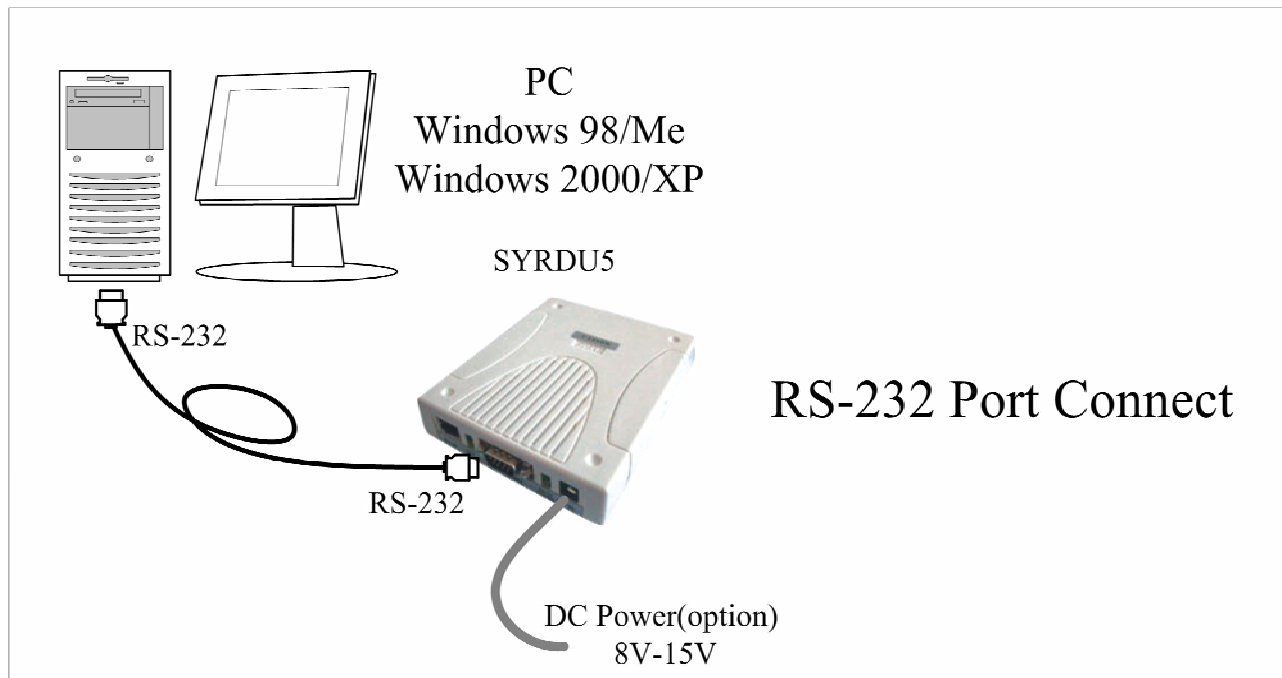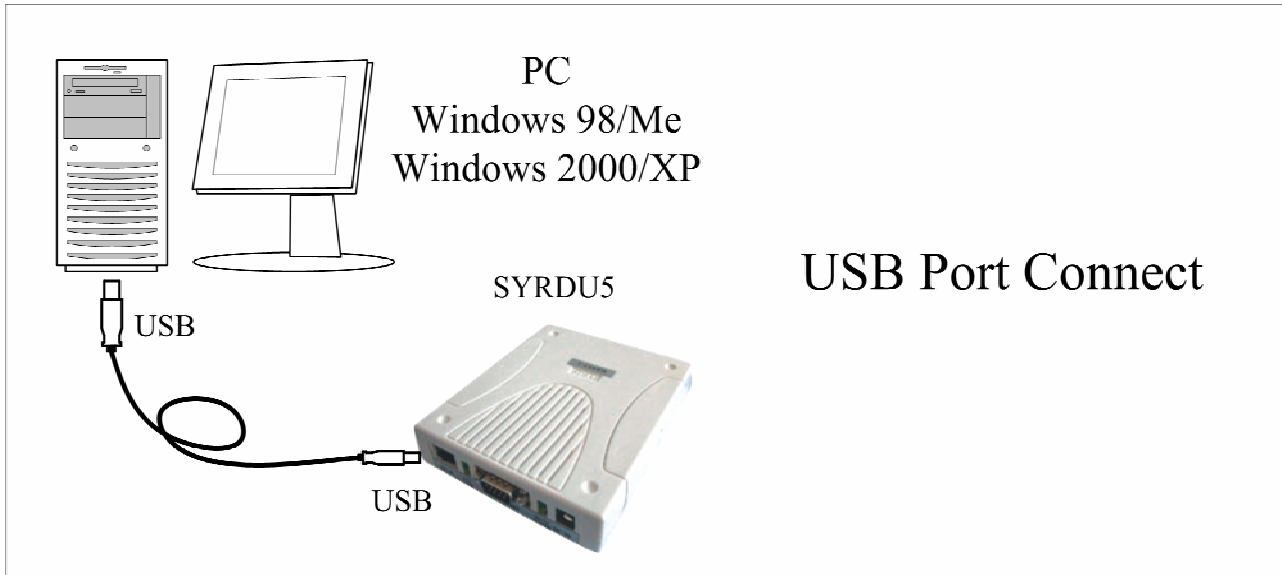

SYRDU5 Specification

Items / Specs	SYRDU5
Frequency	125KHz
Card (Transponder)	SYRIS card (EM compatible)
Read range*	2cm ~ 10cm
Card read time	0.2sec(typical)
Interface #1	USB V1.1
Interface #2	RS-232 formats
Baud rate	19,200 bps (4,800, 9,600, 19,200, 38,400, 57,600, 115,200)
Indicator	4 LED
Beep	Built-in
Color	Beige
Humidity	10% to 95% (Non-condensing)
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	USB or 8V to 15V DC
Dimensions (mm)	107W x 138H x 30D

* This specification is preliminary and is subject to change without prior notice.